


SPEL Puraceptor class 1 full retention separators – Two chamber models

Compliant to the European Standard BS EN 858-1:2002, the Environment Agency's Pollution Prevention Guidelines PPG3 and the Construction Products Regulations



Typical sites include high risk oil/fuel storage and handling areas, filling stations, heavily contaminated industrial areas, commercial vehicle/plant maintenance yards, rail maintenance and fuelling depots, fire training grounds and sub-stations.

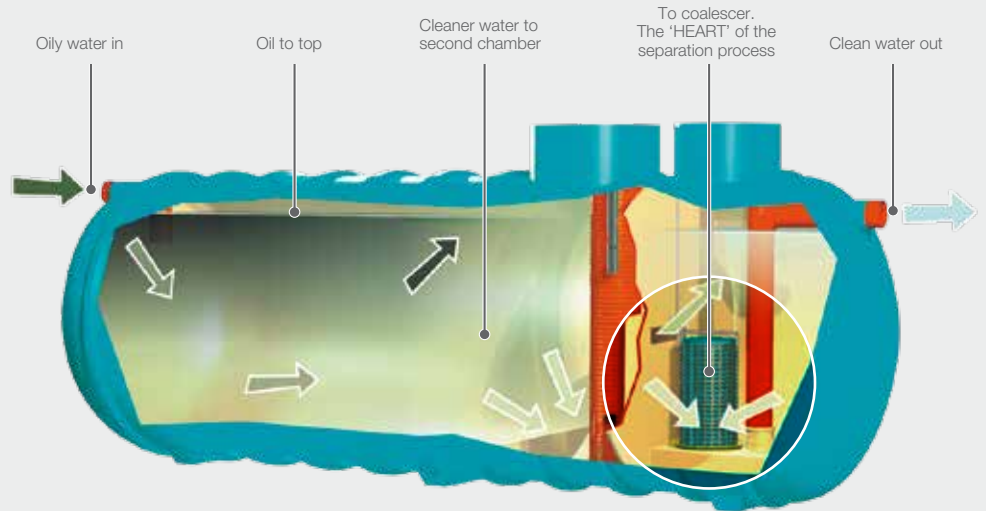

Model	Series	Nominal size (NS)	Catchment area (m ²)	Oil storage (litres)	Silt capacity (litres)	Overall length** (mm) L	Overall diameter (mm)	Inlet Invert (mm) A	Base to Inlet (mm) B	Base to outlet (mm) C	Max in/out pipe diameter (mm)	Number of access shafts (dia. mm)				
												450	600	750	900	1200
P006/2CSC	200	6	333	60	600	3,050	1225	340	1,200	1,140	160	-	-	2	-	-
P010/2CSC	200	10	556	100	1,000	3,820	1225	340	1,200	1,140	160	-	-	2	-	-
P015/2CSC	300	15	833	150	1,500	4,020	1875	350	1,800	1,740	225	-	-	2	-	-
P020/2CSC	300	20	1111	200	2,000	4,020	1875	350	1,800	1,740	225	-	-	2	-	-
P025/2CSC	300	25	1389	250	2,500	4,290	1875	350	1,800	1,740	225	-	-	2	-	-
P030/2CSC	300	30	1667	300	3,000	4,420	1875	390	1,760	1,700	300	-	1*	2	-	-
FP2CSC	300	20	1111	200	2,000	5,500	1875	350	1,800	1,740	225	-	-	2	-	-
P035/2CSC	300	35	1944	350	3,500	5,070	1875	390	1,760	1,700	300	-	1*	2	-	-
P040/2CSC	300	40	2222	400	4,000	5,760	1875	390	1,760	1,700	300	-	1*	2	-	-
P050/2CSC	300	50	2778	500	5,000	7,060	1875	390	1,760	1,700	300	-	1*	2	-	-
P065/2CSC	300	65	3611	650	6,500	9,180	1875	390	1,760	1,700	300	1	-	2	-	-
P065/2CSC	400	65	3611	650	6,500	5,470	2700	425	2,625	2,525	300	1	-	1	1	-
FP15/2CSC	400	15	833	150	1,500	7,400	2700	425	2,625	2,525	300	-	1	2	-	-
P080/2CSC	400	80	4444	800	8,000	5,700	2700	425	2,625	2,525	300	-	-	1	1	-
P100/2CSC	400	100	5555	1000	10,000	7,400	2700	475	2,575	2,475	400	-	-	1	1	-
P125/2CSC	400	125	6944	1250	12,500	8,580	2700	475	2,575	2,475	400	-	-	2	1	-
P150/2CSC	400	150	8333	1500	15,000	10,180	2700	500	2,550	2,450	450	-	-	2	1	-
P200/2CSC	400	200	11110	2000	20,000	13,710	2700	660	2,390	2,290	600	-	1	2	1	-
P300/2CSC	500	300	16665	3000	30,000	12,530	3650	675	3,200	3,100	600	-	1	2	-	1
P350/2CSC	500	350	19443	3500	35,000	13,950	3650	675	3,200	3,100	600	-	2	2	2	-
P400/2CSC	500	400	22220	4000	40,000	15,980	3650	675	3,200	3,100	600	-	2	2	2	-

* SPEL Forecourt Separator Model FP2C has 7,600 litre spill capacity
 ** Larger models available in 500/600 series. Designed to suit specific requirements

